
Notes:

Name:
Date:
Event:
Track: Temp.:
Air temp.:
Traction:
Best lap:

Engine: Pipe:
Manifold: Glowplug: Fuel:

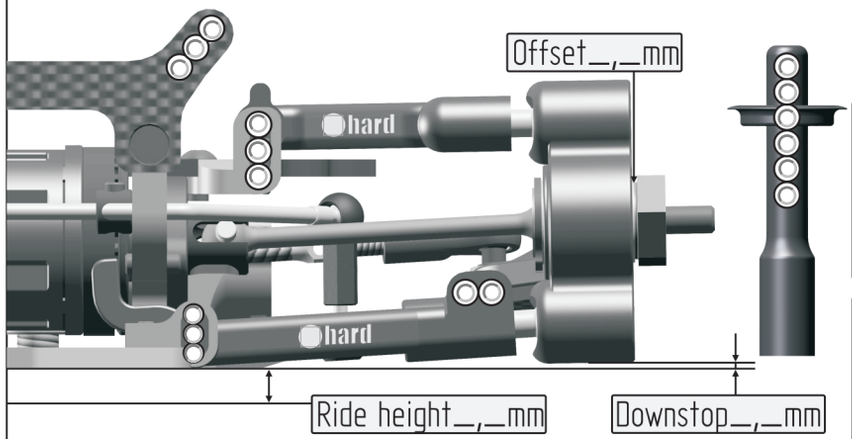


FRONT	REAR

left	right	Tyres:	left	right
		Brand		
		Shore		
		Diameter		

Shocks:
Spring
Oil
Piston
F.p. spring

Anti-roll bars:
Front _,_ mm | Rear _,_ mm

Camber left _,_°
Camber right _,_°
One-way ○
Diff. oil:___K cSt
Solid axle ○
Toe in/out _,_°
Width___,_mm

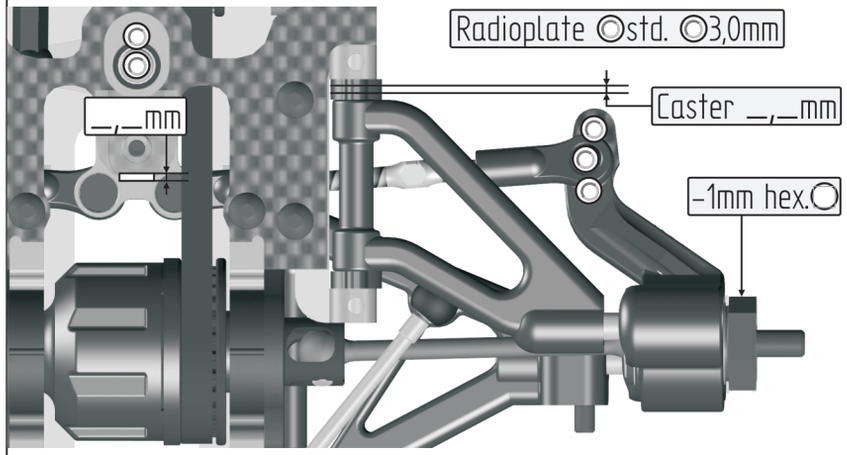


diff position ◎front ◎rear
◎8mm ◎11mm ackermann plate

Clutch:
Type:
Shoe:
Preload:
Gap:

1st Gear ratio: 2nd
__ / __ | __ / __

Body:
Wing: Winglets: ○
Distance to bumber __,_ mm
Bumper type: standard ○|○ wide

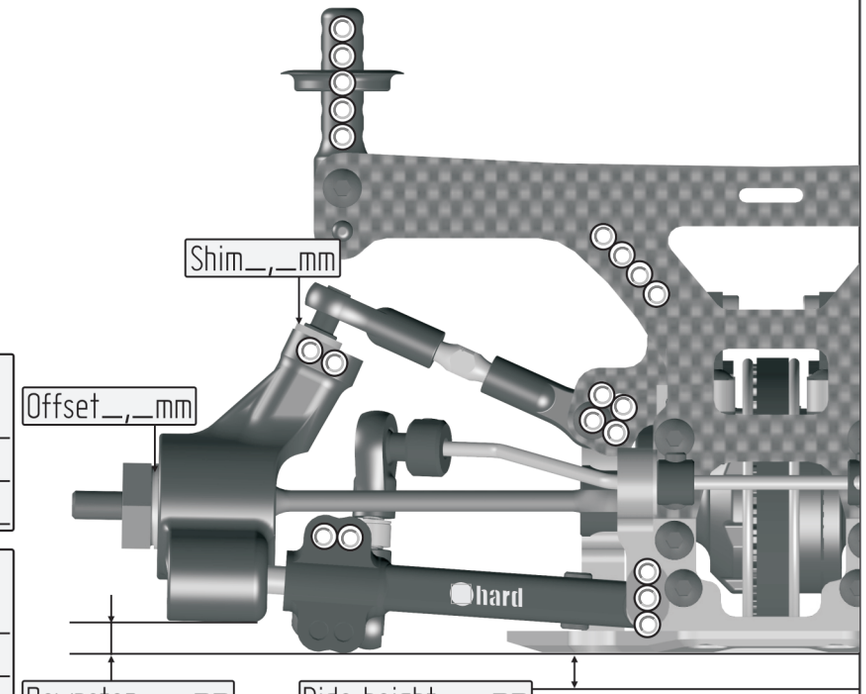

Camber left _,_°
Camber right _,_°
Diff. oil:___K cSt
Toe in/out _,_°
Width___,_mm

One-piece engine mount ○
fixed: ○4screws ○7screws
Gearbox stiffener ○

